

Large size model for cartons and boxes




IX-GA-65100-E

IX-GA-65100-A

IX-G-65130

IX-G-65100-E

IX-G-65100-A



★ IX-GA-65100

Inspection area

The figures above show the permissible inspection range. Portions of the product which are not within the shaded area are not irradiated.

Product size


Height	Width		
	IX-GA-65100(A)	IX-GA-65100(E)	IX-G-65130
0	650	620	650
20	635	606	635
40	320	592	619
60	606	578	603
100	577	550	571
120	562	536	555
140	548	522	539
160	533	509	523
180	518	495	506
200	504	481	491
220	489	467	474
240	475	453	458
260	460	439	441
280	446	425	425
300	431	411	408
320	417	397	392
340	402	383	374
360	387	369	356
380	373	355	339
400	358		
420	344		
440	329		
460	315		
480	300		
500	286		
520	271		
540	256		

Unit: mm



External dimensions (IX-GA-65100)

Unit: mm

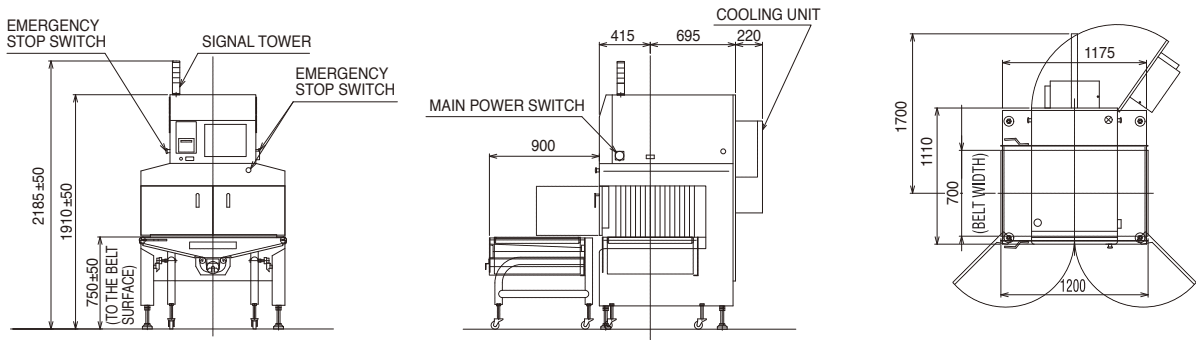

Specifications

Model	IX-GA-65100(-A,-E)	IX-G-65100(-A,-E)	IX-G-65130
X-ray	Tube voltage	40 - 100kV	
	Tube current	1 - 5.0 mA	
	Output	Max 350 W	
X-ray protection	Protective curtain (rapidly detachable)		
X-ray emissions	1 μSv/h or less, including conveyor entrance/exit		
Conveyor	Dimensions	1200 mm (L) × 700 mm (W)* + 100mm at follower side is available as an option	
	Speed	5-30 m/min.	
	Conveying weight	Max 25 kg (over entire length)	
Protective construction	IP65 (Conveyor Unit: IP66)	IP54 (Conveyor Unit: IP66)	
Cooling method	Hermetical air cooling	Compulsory air cooling	
Power supply	AC200/ 208/ 220/ 230/ 240V, 50/60Hz Voltage variation: +/- 10%		
Operation temperature	0°C - 40°C ambient temperature	0°C - 35°C ambient temperature	0°C - 38°C ambient temperature
Operation humidity	30 - 85%RH (with no condensation)		
Machine weight	550 kg		620 kg